

GÜHRING

SuperLine

Promotion

SPECIAL OFFER

1 hydraulic
chuck
+ 5 reduction
bushes

一盒包含一個油壓夾頭
+5 個轉接筒夾



促銷優惠有效日期：30.09.2021

Hydraulic chuck sets 油壓夾頭組

GÜHRING – YOUR WORLDWIDE PARTNER

鈷領是您提升 產能整體解決方案 的最佳伙伴



Variants	incl. hydraulic chuck			incl. reduction bushes		Order no.	促銷價
	Interface	for shank Ø (mm)	Article no.	for shank Ø (mm)	Article no.	編號	
Set 1	HSK-A 63	20.00	4662	6.0 / 8.0 / 10.0 / 12.0 / 12.0	4665	#303802579	13,000
Set 2	MAS /BT 40	20.00	4664	6.0 / 8.0 / 10.0 / 12.0 / 12.0	4665	#303802577	12,000
Set 3	MAS /BT 30			6.0 / 8.0 / 10.0 / 12.0 / 6.0	4665	#303802578	12,000

Each set also includes the hexagon chuck key art. no. 4912 and the adjustment screw art. no. 4900.
每組包含六角扳手 No.4912一支及調整螺絲 No.4900一個




Hydraulic chucks 油壓夾頭 (HSK、SK、BT)

Product information 產品資訊

- HSK-A to ISO 12164-1 / DIN 69893-1
- ISO taper to DIN ISO 7388-1, form AD / AF
- MAS/BT to DIN ISO 7388-2, form JD / JF
- axial length setting 軸向長度調整

- for tool shank tolerance h6
- balancing quality: G2.5/25,000 rev./min or U<1 gmm
- order coolant supply set for HSK-A (art. no. 4949) separately
- order pull studs for ISO taper (art. no. 4925, 4926) and MAS/BT (art. no. 4927, 4928) separately

- 夾持刀具柄部公差 h6
- 動平衡 G2.5/25,000 rev./min or U<1 gmm
- HSK-A中心出水出水螺絲為選配 No.4949，需額外訂購
- 拉頭 ISO Taper No. 4925, 4926；BT Taper No. 4927, 4928 需額外訂購

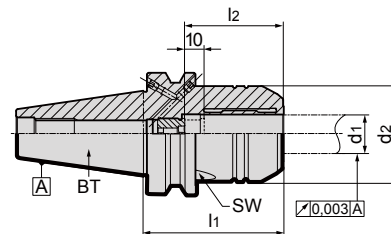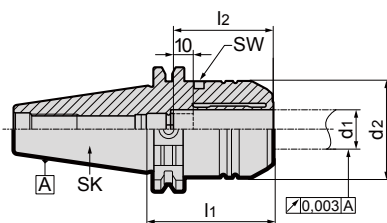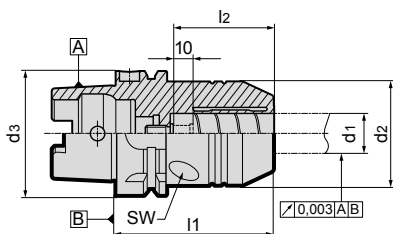


Interface	d1	d2	l1	l2	Weight	SW	Code no.	編號	促銷價
	mm	mm	mm	mm	kg	mm			
HSK-A 63	20.00	52.50	80.00	51.00	1.310	5.0	20.063	4662	6,000
ISO taper 40	20.00	49.30	64.50	51.00	1.250	5.0	20.040	4663	5,000
MAS /BT 40	20.00	49.30	72.50	51.00	1.250	5.0	20.040	4664	5,000
MAS /BT 30	20.00	46.00	88.00	51.00	1.000	5.0	訂製品		5,000

Reduction bushes 轉接筒夾 (類似 # 4368)

d1	l3	Code no.	Article no.	促銷價
mm	mm	編碼	編號	
6	27.00	6.020	4665	1,400
8	27.00	8.020	4665	1,400
10	31.00	10.020	4665	1,400
12	35.00	12.020	4665	1,400
16	35.00	16.020	4665	1,400

Product information

- for clamping smaller shank Ø in hydraulic chucks
- clamping Ø for tool shank tolerance h6
- concentricity ≤ 5 µm
- leakproof
- 夾持柄部公差為 h6
- 偏擺 ≤ 5 µm
- 防漏型



台灣鈷領股份有限公司 Guhring Taiwan Ltd.

桃園總公司：(32846)桃園市觀音區忠愛路2段200號

中部辦事處：(40764)台中市西屯區台灣大道四段936號10F之3

南部辦事處：(82054)高雄市岡山區大仁南路140號

Website: <http://www.guhring.com.tw>

Tel : +886-3-498-7530 Fax : +886-3-498-7331

Tel : +886-4-2463-3788 Fax : +886-4-2463-0793

Tel : +886-7-622-4855 Fax : +886-7-622-4123

E-mail : info@guhring.com.tw