




Ratio drills with coolant ducts 15D 鎢鋼長鑽頭 鋼用

Article no. 6509


15D 鎢鋼長鑽頭 鋼用 需鑽有1D深m7公差之導引鑽

Cutting data page 420



B60

Web thinning ≥ Ø 3.000 • main cutting edge form concave • optimised flute cross-section • maximum diameter of coolant ducts • observe coolant pressure

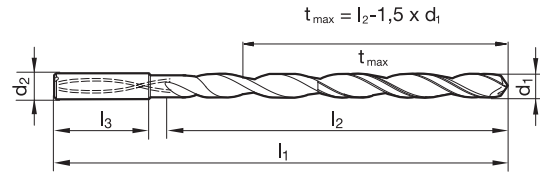

Article no. 6509

Article no. 6509

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
3.000		6.0	95.0	55.0	36.0	6509 3.000	11,300
3.100		6.0	106.0	66.0	36.0	6509 3.100	11,300
3.170	1/8	6.0	106.0	66.0	36.0	6509 3.170	11,300
3.200		6.0	106.0	66.0	36.0	6509 3.200	11,300
3.300		6.0	106.0	66.0	36.0	6509 3.300	11,300
3.500		6.0	116.0	76.0	36.0	6509 3.500	11,300
3.570	9/64	6.0	116.0	76.0	36.0	6509 3.570	11,600
3.700		6.0	116.0	76.0	36.0	6509 3.700	11,600
3.800		6.0	116.0	76.0	36.0	6509 3.800	11,600
3.970	5/32	6.0	116.0	76.0	36.0	6509 3.970	11,600
4.000		6.0	116.0	76.0	36.0	6509 4.000	12,000
4.200		6.0	133.0	93.0	36.0	6509 4.200	12,900
4.300		6.0	133.0	93.0	36.0	6509 4.300	12,900
4.370	11/64	6.0	133.0	93.0	36.0	6509 4.370	13,100
4.500		6.0	133.0	93.0	36.0	6509 4.500	13,400
4.600		6.0	133.0	93.0	36.0	6509 4.600	13,400
4.760	3/16	6.0	133.0	93.0	36.0	6509 4.760	13,500
4.800		6.0	133.0	93.0	36.0	6509 4.800	13,500
5.000		6.0	133.0	93.0	36.0	6509 5.000	13,600
5.100		6.0	150.0	110.0	36.0	6509 5.100	13,900
5.160	13/64	6.0	150.0	110.0	36.0	6509 5.160	13,900
5.410		6.0	150.0	110.0	36.0	6509 5.410	14,100
5.500		6.0	150.0	110.0	36.0	6509 5.500	14,300
5.560	7/32	6.0	150.0	110.0	36.0	6509 5.560	14,400
5.600		6.0	150.0	110.0	36.0	6509 5.600	14,400
5.800		6.0	150.0	110.0	36.0	6509 5.800	14,400
5.950	15/64	6.0	150.0	110.0	36.0	6509 5.950	15,600
6.000		6.0	150.0	110.0	36.0	6509 6.000	15,700
6.300		8.0	167.0	127.0	36.0	6509 6.300	17,000
6.350	1/4	8.0	167.0	127.0	36.0	6509 6.350	17,000
6.500		8.0	167.0	127.0	36.0	6509 6.500	17,200
6.500		8.0	167.0	127.0	36.0	6509 6.750	17,300
6.750	17/64	8.0	167.0	127.0	36.0	6509 6.800	17,300
6.800		8.0	167.0	127.0	36.0	6509 7.000	17,400
7.000		8.0	167.0	127.0	36.0	6509 7.140	18,400
7.140	9/32	8.0	183.0	143.0	36.0	6509 7.500	19,100
7.500		8.0	183.0	143.0	36.0	6509 7.540	19,100
7.540	19/64	8.0	183.0	143.0	36.0	6509 7.800	19,100
7.800		8.0	183.0	143.0	36.0	6509 7.940	20,300
7.940	5/16	8.0	183.0	143.0	36.0	6509 8.000	20,400
8.000		8.0	183.0	143.0	36.0	6509 8.330	21,700
8.330	21/64	10.0	204.0	160.0	40.0	6509 8.500	22,500
8.500		10.0	204.0	160.0	40.0		

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
8.730	11/32	10.0	204.0	160.0	40.0	6509 8.730	22,600
8.800		10.0	204.0	160.0	40.0	6509 8.800	22,600
9.000		10.0	204.0	160.0	40.0	6509 9.000	22,900
9.130	23/64	10.0	221.0	177.0	40.0	6509 9.130	22,900
9.500		10.0	221.0	177.0	40.0	6509 9.500	22,900
9.520	3/8	10.0	221.0	177.0	40.0	6509 9.520	22,900
9.800		10.0	221.0	177.0	40.0	6509 9.800	22,900
9.920	25/64	10.0	221.0	177.0	40.0	6509 9.920	22,900
10.000		10.0	221.0	177.0	40.0	6509 10.000	22,900
10.200		12.0	247.0	198.0	45.0	6509 10.200	23,300
10.320	13/32	12.0	247.0	198.0	45.0	6509 10.320	23,300
10.500		12.0	247.0	198.0	45.0	6509 10.500	23,300
10.720	27/64	12.0	247.0	198.0	45.0	6509 10.720	23,700
11.000		12.0	247.0	198.0	45.0	6509 11.000	24,000
11.110	7/16	12.0	263.0	214.0	45.0	6509 11.110	24,000
11.510	29/64	12.0	263.0	214.0	45.0	6509 11.510	24,700
11.800		12.0	263.0	214.0	45.0	6509 11.800	24,700
11.910	15/32	12.0	263.0	214.0	45.0	6509 11.910	25,200
12.000		12.0	263.0	214.0	45.0	6509 12.000	25,200
12.300	31/64	14.0	297.0	248.0	45.0	6509 12.300	26,900
12.500		14.0	297.0	248.0	45.0	6509 12.500	26,900
12.700	1/2	14.0	297.0	248.0	45.0	6509 12.700	28,800
13.000		14.0	297.0	248.0	45.0	6509 13.000	28,800
13.100	33/64	14.0	297.0	248.0	45.0	6509 13.100	31,100
13.490	17/32	14.0	297.0	248.0	45.0	6509 13.490	33,800
13.890	35/64	14.0	297.0	248.0	45.0	6509 13.890	36,000
14.000		14.0	297.0	248.0	45.0	6509 14.000	36,000
14.290	9/16	16.0	333.0	281.0	48.0	6509 14.290	42,300
15.000		16.0	333.0	281.0	48.0	6509 15.000	42,300
15.870	5/8	16.0	333.0	281.0	48.0	6509 15.870	42,300
16.000		16.0	333.0	281.0	48.0	6509 16.000	42,300



# Solid carbide drills


Ratio drills with coolant ducts 20D 鎢鋼長鑽頭 鋼用

Article no. 6511


20D 鎢鋼長鑽頭 鋼用 需鑽有1D深m7公差之導引鑽

Cutting data page 421

B61



Web thinning  $\geq \varnothing 3.000$  • main cutting edge form concave • optimised flute cross-section • maximum diameter of coolant ducts • observe coolant pressure

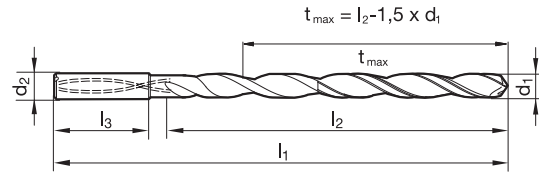

Article no. 6511

Article no. 6511

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
3.000		6.0	110.0	70.0	36.0	6511 3.000	12,900
3.100		6.0	123.0	83.0	36.0	6511 3.100	12,900
3.170	1/8	6.0	123.0	83.0	36.0	6511 3.170	12,900
3.200		6.0	123.0	83.0	36.0	6511 3.200	12,900
3.300		6.0	123.0	83.0	36.0	6511 3.300	12,900
3.500		6.0	136.0	96.0	36.0	6511 3.500	12,900
3.570	9/64	6.0	136.0	96.0	36.0	6511 3.570	13,200
3.700		6.0	136.0	96.0	36.0	6511 3.700	13,200
3.800		6.0	136.0	96.0	36.0	6511 3.800	13,200
3.970	5/32	6.0	136.0	96.0	36.0	6511 3.970	13,200
4.000		6.0	136.0	96.0	36.0	6511 4.000	13,600
4.200		6.0	158.0	118.0	36.0	6511 4.200	14,700
4.300		6.0	158.0	118.0	36.0	6511 4.300	14,700
4.370	11/64	6.0	158.0	118.0	36.0	6511 4.370	14,700
4.500		6.0	158.0	118.0	36.0	6511 4.500	15,200
4.600		6.0	158.0	118.0	36.0	6511 4.600	15,200
4.760	3/16	6.0	158.0	118.0	36.0	6511 4.760	15,400
4.800		6.0	158.0	118.0	36.0	6511 4.800	15,400
5.000		6.0	158.0	118.0	36.0	6511 5.000	15,500
5.100		6.0	180.0	140.0	36.0	6511 5.100	15,600
5.160	13/64	6.0	180.0	140.0	36.0	6511 5.160	15,600
5.410		6.0	180.0	140.0	36.0	6511 5.410	16,100
5.500		6.0	180.0	140.0	36.0	6511 5.500	16,200
5.560	7/32	6.0	180.0	140.0	36.0	6511 5.560	16,300
5.800		6.0	180.0	140.0	36.0	6511 5.800	16,300
5.950	15/64	6.0	180.0	140.0	36.0	6511 5.950	17,700
6.000		6.0	180.0	140.0	36.0	6511 6.000	18,000
6.300		8.0	202.0	162.0	36.0	6511 6.300	19,200
6.350	1/4	8.0	202.0	162.0	36.0	6511 6.350	19,200
6.500		8.0	202.0	162.0	36.0	6511 6.500	19,500
6.750	17/64	8.0	202.0	162.0	36.0	6511 6.750	19,600
6.800		8.0	202.0	162.0	36.0	6511 6.800	19,600
7.000		8.0	202.0	162.0	36.0	6511 7.000	19,800
7.140	9/32	8.0	223.0	183.0	36.0	6511 7.140	21,100
7.500		8.0	223.0	183.0	36.0	6511 7.500	21,500
7.540	19/64	8.0	223.0	183.0	36.0	6511 7.540	21,600

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
7.800		8.0	223.0	183.0	36.0	6511 7.800	21,600
7.940	5/16	8.0	223.0	183.0	36.0	6511 7.940	23,100
8.000		8.0	223.0	183.0	36.0	6511 8.000	23,300
8.330	21/64	10.0	249.0	205.0	40.0	6511 8.330	24,700
8.500		10.0	249.0	205.0	40.0	6511 8.500	25,600
8.730	11/32	10.0	249.0	205.0	40.0	6511 8.730	25,700
8.800		10.0	249.0	205.0	40.0	6511 8.800	25,700
9.000		10.0	249.0	205.0	40.0	6511 9.000	25,900
9.130	23/64	10.0	271.0	227.0	40.0	6511 9.130	25,900
9.520	3/8	10.0	271.0	227.0	40.0	6511 9.520	25,900
9.920	25/64	10.0	271.0	227.0	40.0	6511 9.920	25,900
10.000		10.0	271.0	227.0	40.0	6511 10.000	25,900
10.200		12.0	302.0	253.0	45.0	6511 10.200	26,400
10.320	13/32	12.0	302.0	253.0	45.0	6511 10.320	26,400
10.500		12.0	302.0	253.0	45.0	6511 10.500	26,400
10.720	27/64	12.0	302.0	253.0	45.0	6511 10.720	26,900
11.000		12.0	302.0	253.0	45.0	6511 11.000	27,300
11.110	7/16	12.0	323.0	274.0	45.0	6511 11.110	27,400
11.510	29/64	12.0	323.0	274.0	45.0	6511 11.510	27,700
11.800		12.0	323.0	274.0	45.0	6511 11.800	27,700
11.910	15/32	12.0	323.0	274.0	45.0	6511 11.910	28,300
12.000		12.0	323.0	274.0	45.0	6511 12.000	28,800
12.300	31/64	14.0	367.0	318.0	45.0	6511 12.300	30,400
12.500		14.0	367.0	318.0	45.0	6511 12.500	30,400
12.700	1/2	14.0	367.0	318.0	45.0	6511 12.700	32,700
13.000		14.0	367.0	318.0	45.0	6511 13.000	32,700
13.100	33/64	14.0	367.0	318.0	45.0	6511 13.100	35,500
13.490	17/32	14.0	367.0	318.0	45.0	6511 13.490	38,800
13.890	35/64	14.0	367.0	318.0	45.0	6511 13.890	41,000
14.000		14.0	367.0	318.0	45.0	6511 14.000	41,000
14.290	9/16	16.0	413.0	361.0	48.0	6511 14.290	48,200
15.000		16.0	413.0	361.0	48.0	6511 15.000	48,200
15.870	5/8	16.0	413.0	361.0	48.0	6511 15.870	48,200
16.000		16.0	413.0	361.0	48.0	6511 16.000	48,200




Ratio drills with coolant ducts 25D 鎢鋼長鑽頭 鋼用

Article no. 6512


25D 鎢鋼長鑽頭 鋼用 需鑽有1D深m7公差之導引鑽

Cutting data page 422



B62

Web thinning ≥ Ø 3.000 • main cutting edge form concave • optimised flute cross-section • maximum diameter of coolant ducts • observe coolant pressure

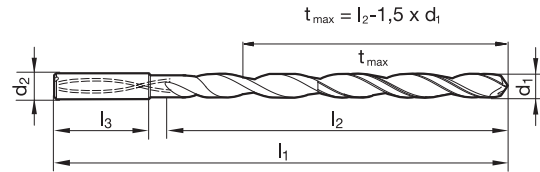

Article no. 6512

Article no. 6512

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
3.000		6.0	125.0	85.0	36.0	6512 3.000	14,100
3.100		6.0	141.0	101.0	36.0	6512 3.100	14,100
3.170	1/8	6.0	141.0	101.0	36.0	6512 3.170	14,100
3.200		6.0	141.0	101.0	36.0	6512 3.200	14,100
3.300		6.0	141.0	101.0	36.0	6512 3.300	14,100
3.500		6.0	156.0	116.0	36.0	6512 3.500	14,100
3.570	9/64	6.0	156.0	116.0	36.0	6512 3.570	14,500
3.700		6.0	156.0	116.0	36.0	6512 3.700	14,500
3.800		6.0	156.0	116.0	36.0	6512 3.800	14,500
3.970	5/32	6.0	156.0	116.0	36.0	6512 3.970	14,500
4.000		6.0	156.0	116.0	36.0	6512 4.000	15,200
4.200		6.0	183.0	143.0	36.0	6512 4.200	15,400
4.300		6.0	183.0	143.0	36.0	6512 4.300	15,400
4.370	11/64	6.0	183.0	143.0	36.0	6512 4.370	15,400
4.500		6.0	183.0	143.0	36.0	6512 4.500	17,100
4.600		6.0	183.0	143.0	36.0	6512 4.600	17,100
4.760	3/16	6.0	183.0	143.0	36.0	6512 4.760	17,400
4.800		6.0	183.0	143.0	36.0	6512 4.800	17,400
5.000		6.0	183.0	143.0	36.0	6512 5.000	17,700
5.100		6.0	210.0	170.0	36.0	6512 5.100	18,000
5.160	13/64	6.0	210.0	170.0	36.0	6512 5.160	18,100
5.410		6.0	210.0	170.0	36.0	6512 5.410	18,400
5.500		6.0	210.0	170.0	36.0	6512 5.500	18,500
5.560	7/32	6.0	210.0	170.0	36.0	6512 5.560	18,700
5.800		6.0	210.0	170.0	36.0	6512 5.800	18,700
5.950	15/64	6.0	210.0	170.0	36.0	6512 5.950	19,400
6.000		6.0	210.0	170.0	36.0	6512 6.000	21,200
6.300		8.0	237.0	197.0	36.0	6512 6.300	21,600
6.350	1/4	8.0	237.0	197.0	36.0	6512 6.350	21,700
6.500		8.0	237.0	197.0	36.0	6512 6.500	21,800
6.750	17/64	8.0	237.0	197.0	36.0	6512 6.750	22,200
6.800		8.0	237.0	197.0	36.0	6512 6.800	22,200
7.000		8.0	237.0	197.0	36.0	6512 7.000	22,300
7.140	9/32	8.0	263.0	223.0	36.0	6512 7.140	24,000
7.500		8.0	263.0	223.0	36.0	6512 7.500	24,700
7.540	19/64	8.0	263.0	223.0	36.0	6512 7.540	24,800

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
7.940	5/16	8.0	263.0	223.0	36.0	6512 7.940	26,700
8.000		8.0	263.0	223.0	36.0	6512 8.000	26,900
8.330	21/64	10.0	294.0	250.0	40.0	6512 8.330	28,300
8.500		10.0	294.0	250.0	40.0	6512 8.500	29,400
8.730	11/32	10.0	294.0	250.0	40.0	6512 8.730	31,100
8.800		10.0	294.0	250.0	40.0	6512 8.800	31,600
9.000		10.0	294.0	250.0	40.0	6512 9.000	32,700
9.130	23/64	10.0	321.0	277.0	40.0	6512 9.130	32,700
9.520	3/8	10.0	321.0	277.0	40.0	6512 9.520	32,700
9.920	25/64	10.0	321.0	277.0	40.0	6512 9.920	32,700
10.000		10.0	321.0	277.0	40.0	6512 10.000	32,700
10.320	13/32	12.0	359.0	310.0	45.0	6512 10.320	34,300
10.720	27/64	12.0	359.0	310.0	45.0	6512 10.720	34,900
11.000		12.0	359.0	310.0	45.0	6512 11.000	35,500
11.110	7/16	12.0	386.0	337.0	45.0	6512 11.110	35,500
11.510	29/64	12.0	386.0	337.0	45.0	6512 11.510	37,100
11.910	15/32	12.0	386.0	337.0	45.0	6512 11.910	37,600
12.000		12.0	386.0	337.0	45.0	6512 12.000	37,600
12.300	31/64	14.0	437.0	388.0	45.0	6512 12.300	38,300
12.700	1/2	14.0	437.0	388.0	45.0	6512 12.700	41,100
13.000		14.0	437.0	388.0	45.0	6512 13.000	41,100
13.100	33/64	14.0	437.0	388.0	45.0	6512 13.100	44,600
13.490	17/32	14.0	437.0	388.0	45.0	6512 13.490	48,800
13.890	35/64	14.0	437.0	388.0	45.0	6512 13.890	51,600
14.000		14.0	437.0	388.0	45.0	6512 14.000	51,600
14.290	9/16	16.0	493.0	441.0	48.0	6512 14.290	60,500
15.000		16.0	493.0	441.0	48.0	6512 15.000	60,500
15.870	5/8	16.0	493.0	441.0	48.0	6512 15.870	60,500
16.000		16.0	493.0	441.0	48.0	6512 16.000	60,500



# Solid carbide drills

Ratio drills with coolant ducts 30D 鎢鋼長鑽頭 鋼用

Article no. 6513




30D 鎢鋼長鑽頭 鋼用


需鑽有1D深m7公差之導引鑽

Cutting data page 423

B63



Web thinning  $\geq \varnothing 3.000$  • main cutting edge form concave • optimised flute cross-section • maximum diameter of coolant ducts • observe coolant pressure

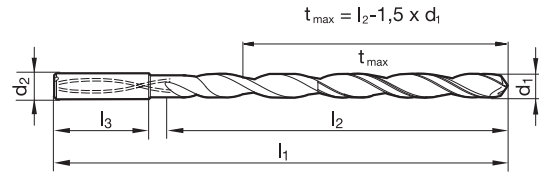

Article no. 6513

Article no. 6513

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
3.000		6.0	140.0	100.0	36.0	6513 3.000	16,000
3.100		6.0	158.0	118.0	36.0	6513 3.100	16,000
3.170	1/8	6.0	158.0	118.0	36.0	6513 3.170	16,000
3.200		6.0	158.0	118.0	36.0	6513 3.200	16,000
3.300		6.0	158.0	118.0	36.0	6513 3.300	16,000
3.500		6.0	176.0	136.0	36.0	6513 3.500	16,000
3.570	9/64	6.0	176.0	136.0	36.0	6513 3.570	16,500
3.700		6.0	176.0	136.0	36.0	6513 3.700	16,500
3.800		6.0	176.0	136.0	36.0	6513 3.800	16,500
3.970	5/32	6.0	176.0	136.0	36.0	6513 3.970	16,500
4.000		6.0	176.0	136.0	36.0	6513 4.000	17,300
4.200		6.0	208.0	168.0	36.0	6513 4.200	19,400
4.370	11/64	6.0	208.0	168.0	36.0	6513 4.370	19,400
4.500		6.0	208.0	168.0	36.0	6513 4.500	20,200
4.760	3/16	6.0	208.0	168.0	36.0	6513 4.760	20,300
5.000		6.0	208.0	168.0	36.0	6513 5.000	20,500
5.100		6.0	240.0	200.0	36.0	6513 5.100	20,700
5.160	13/64	6.0	240.0	200.0	36.0	6513 5.160	21,100
5.410		6.0	240.0	200.0	36.0	6513 5.410	21,500
5.500		6.0	240.0	200.0	36.0	6513 5.500	21,600
5.560	7/32	6.0	240.0	200.0	36.0	6513 5.560	21,700
5.950	15/64	6.0	240.0	200.0	36.0	6513 5.950	23,800
6.000		6.0	240.0	200.0	36.0	6513 6.000	24,200
6.300		8.0	272.0	232.0	36.0	6513 6.300	24,700
6.350	1/4	8.0	272.0	232.0	36.0	6513 6.350	24,800
6.500		8.0	272.0	232.0	36.0	6513 6.500	26,100
6.750	17/64	8.0	272.0	232.0	36.0	6513 6.750	26,100
6.800		8.0	272.0	232.0	36.0	6513 6.800	26,100
7.000		8.0	272.0	232.0	36.0	6513 7.000	26,100
7.140	9/32	8.0	303.0	263.0	36.0	6513 7.140	27,600

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
7.500		8.0	303.0	263.0	36.0	6513 7.500	29,400
7.540	19/64	8.0	303.0	263.0	36.0	6513 7.540	29,400
7.940	5/16	8.0	303.0	263.0	36.0	6513 7.940	31,100
8.000		8.0	303.0	263.0	36.0	6513 8.000	31,100
8.330	21/64	10.0	339.0	295.0	40.0	6513 8.330	32,100
8.500		10.0	339.0	295.0	40.0	6513 8.500	32,700
8.730	11/32	10.0	339.0	295.0	40.0	6513 8.730	34,300
8.800		10.0	339.0	295.0	40.0	6513 8.800	34,300
9.000		10.0	339.0	295.0	40.0	6513 9.000	34,900
9.130	23/64	10.0	371.0	327.0	40.0	6513 9.130	34,900
9.520	3/8	10.0	371.0	327.0	40.0	6513 9.520	34,900
9.920	25/64	10.0	371.0	327.0	40.0	6513 9.920	34,900
10.000		10.0	371.0	327.0	40.0	6513 10.000	34,900
10.320	13/32	12.0	412.0	363.0	45.0	6513 10.320	37,400
10.720	27/64	12.0	412.0	363.0	45.0	6513 10.720	38,000
11.000		12.0	412.0	363.0	45.0	6513 11.000	38,500
11.110	7/16	12.0	443.0	394.0	45.0	6513 11.110	38,500
11.510	29/64	12.0	443.0	394.0	45.0	6513 11.510	40,400
11.910	15/32	12.0	443.0	394.0	45.0	6513 11.910	41,000
12.000		12.0	443.0	394.0	45.0	6513 12.000	41,000
12.300	31/64	14.0	507.0	458.0	45.0	6513 12.300	41,700
12.700	1/2	14.0	507.0	458.0	45.0	6513 12.700	44,800
13.000		14.0	507.0	458.0	45.0	6513 13.000	44,800
13.100	33/64	14.0	507.0	458.0	45.0	6513 13.100	48,500
13.490	17/32	14.0	507.0	458.0	45.0	6513 13.490	53,100
13.890	35/64	14.0	507.0	458.0	45.0	6513 13.890	56,100
14.000		14.0	507.0	458.0	45.0	6513 14.000	56,100



Ratio drills with coolant ducts 40D 鎢鋼長鑽頭 鋼用


Article no. 6514



40D 鎢鋼長鑽頭 鋼用


需鑽有1D深m7公差之導引鑽

Cutting data page 424



B64

Web thinning  $\geq \varnothing 3.000$  • main cutting edge form concave • optimised flute cross-section • maximum diameter of coolant ducts • observe coolant pressure

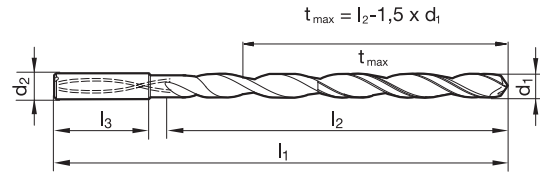

Article no. 6514

Article no. 6514

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
3.000		6.0	170.0	130.0	36.0	6514 3.000	19,200
3.100		6.0	193.0	153.0	36.0	6514 3.100	19,200
3.170	1/8	6.0	193.0	153.0	36.0	6514 3.170	19,200
3.200		6.0	193.0	153.0	36.0	6514 3.200	19,200
3.300		6.0	193.0	153.0	36.0	6514 3.300	19,200
3.500		6.0	193.0	153.0	36.0	6514 3.500	19,200
3.570	9/64	6.0	216.0	176.0	36.0	6514 3.570	19,800
3.800		6.0	216.0	176.0	36.0	6514 3.800	19,800
3.970	5/32	6.0	216.0	176.0	36.0	6514 3.970	19,800
4.000		6.0	216.0	176.0	36.0	6514 4.000	20,700
4.200		6.0	238.0	198.0	36.0	6514 4.200	23,100
4.370	11/64	6.0	238.0	198.0	36.0	6514 4.370	23,400
4.500		6.0	238.0	198.0	36.0	6514 4.500	24,200
4.760	3/16	6.0	258.0	218.0	36.0	6514 4.760	24,300
5.000		6.0	258.0	218.0	36.0	6514 5.000	24,700
5.100		6.0	280.0	240.0	36.0	6514 5.100	24,800
5.160	13/64	6.0	280.0	240.0	36.0	6514 5.160	24,900
5.410		6.0	280.0	240.0	36.0	6514 5.410	25,700

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	價格
5.500		6.0	280.0	240.0	36.0	6514 5.500	25,900
5.560	7/32	6.0	300.0	260.0	36.0	6514 5.560	26,100
5.950	15/64	6.0	300.0	260.0	36.0	6514 5.950	28,800
6.000		6.0	300.0	260.0	36.0	6514 6.000	28,800
6.300		8.0	322.0	282.0	36.0	6514 6.300	30,000
6.350	1/4	8.0	322.0	282.0	36.0	6514 6.350	30,000
6.500		8.0	322.0	282.0	36.0	6514 6.500	31,100
6.750	17/64	8.0	342.0	302.0	36.0	6514 6.750	31,100
6.800		8.0	342.0	302.0	36.0	6514 6.800	31,100
7.000		8.0	342.0	302.0	36.0	6514 7.000	31,100
7.140	9/32	8.0	363.0	323.0	36.0	6514 7.140	32,700
7.500		8.0	363.0	323.0	36.0	6514 7.500	34,300
7.540	19/64	8.0	383.0	343.0	36.0	6514 7.540	34,300
7.940	5/16	8.0	383.0	343.0	36.0	6514 7.940	34,900
8.000		8.0	383.0	343.0	36.0	6514 8.000	34,900
8.500		10.0	409.0	365.0	40.0	6514 8.500	38,400
9.000		10.0	429.0	386.0	40.0	6514 9.000	41,000
10.000		10.0	471.0	427.0	40.0	6514 10.000	41,000